

# THE ICONIC FORD FALCON XB GT

SCALE  
1:8



Right Headlight

Published weekly  
UK: £10.99 AUS: \$21.99



POST-APOCALYPTIC EDITION

# THE ICONIC FORD FALCON XB GT

ISSUE 92

## ASSEMBLY GUIDE

3

The right headlight is assembled and fitted to the front skirt assembly.

## YOUR MODEL

You will be building a 1:8 scale replica of a customised 1973 Ford Falcon XB GT. Features include a lift-up bonnet that reveals a detailed engine, opening doors, wind-down windows and an 'active' steering wheel. A remote-control fob illuminates the main lights, brake lights and indicators.

Scale: 1:8  
Length: 62cm  
Width: 25cm  
Height: 19cm  
Weight: 7+kg



  
Official  
Licensed Product

Ford Motor Company  
trademarks and trade dress  
used under licence to GRE  
for Groupe ELIGOR

### CUSTOMER SERVICE, SUBSCRIPTIONS & BACK ORDERS

Please visit [hachettepartworks.com/contact](http://hachettepartworks.com/contact) to get in touch.

Published by Hachette Partworks Ltd  
4th Floor, Jordan House, 47 Brunswick Place,  
London, N1 6EB  
[www.hachettepartworks.com](http://www.hachettepartworks.com)

hachette  
PARTWORKS LTD

© 2026 Hachette Partworks Ltd  
© 2026 Ford Motor Company  
Distributed in the UK and Republic of Ireland by Marketforce.  
Printed in the United Kingdom  
ISSN 2976-5811

Complete in 130 issues.

### ALL RIGHTS RESERVED

Items may vary from those shown.  
All parts belong to a kit. Collectors' item for adults. Not suitable for children under 14. Some parts may have sharp edges, please handle them with care.

The installation of electronic parts must always be carried out by an adult. When replacing batteries, use the same type of batteries. Please ensure that the battery compartment is securely fastened before you use the model again. Used batteries should be recycled. Please make sure to check with your local council how batteries should be disposed of in your area. Batteries can present a choking danger to small children and may cause serious harm if ingested. Do not leave them lying around and keep any spare batteries locked away at all times.

The editor's policy is to use papers that are natural, renewable and recyclable products and made from wood grown in sustainable forests. The logging and manufacturing processes are expected to conform to the environmental regulations of the country of origin.

In the event of a significant increase in production and transport costs, the publisher reserves the right to modify its selling prices.

**MANAGING DIRECTOR** – Isabelle Couderc  
**EDITORIAL DIRECTOR** – Helen Nally  
**MARKETING DIRECTOR** – Elise Windmill  
**PRODUCTION DIRECTOR** – Sema Sant Anna  
**MANAGING EDITOR** – Sarah Gale  
**PROJECT EDITOR** – Gary Webb  
**DISTRIBUTION MANAGER** – Paul Smith  
**PRODUCT MANAGER** – Rhys Myner



For our  
environmental  
policy in full  
please scan the  
QR code here



**NOT SUITABLE FOR CHILDREN  
UNDER THE AGE OF 14.**  
This product is not a toy and is  
not intended for use in play.

Editorial and design: Windmill Books Ltd


Picture credits:  
Front cover: Jess Esposito and David Burton, main;  
Richard Bryden, bl; Shutterstock, Steven Giles, background  
Step-by-step photography: Richard Bryden  
Model photography: Jess Esposito and David Burton

Windmill Books has made every attempt to contact the copyright holder, if you have any information please contact Sophie Mortimer: [smortimer@windmillbooks.co.uk](mailto:smortimer@windmillbooks.co.uk)

t=top, c=centre, b=bottom, l=left, r=right, u=upper

# Stage 92: Right Headlight

The right headlight is assembled and fitted to the front skirt assembly.

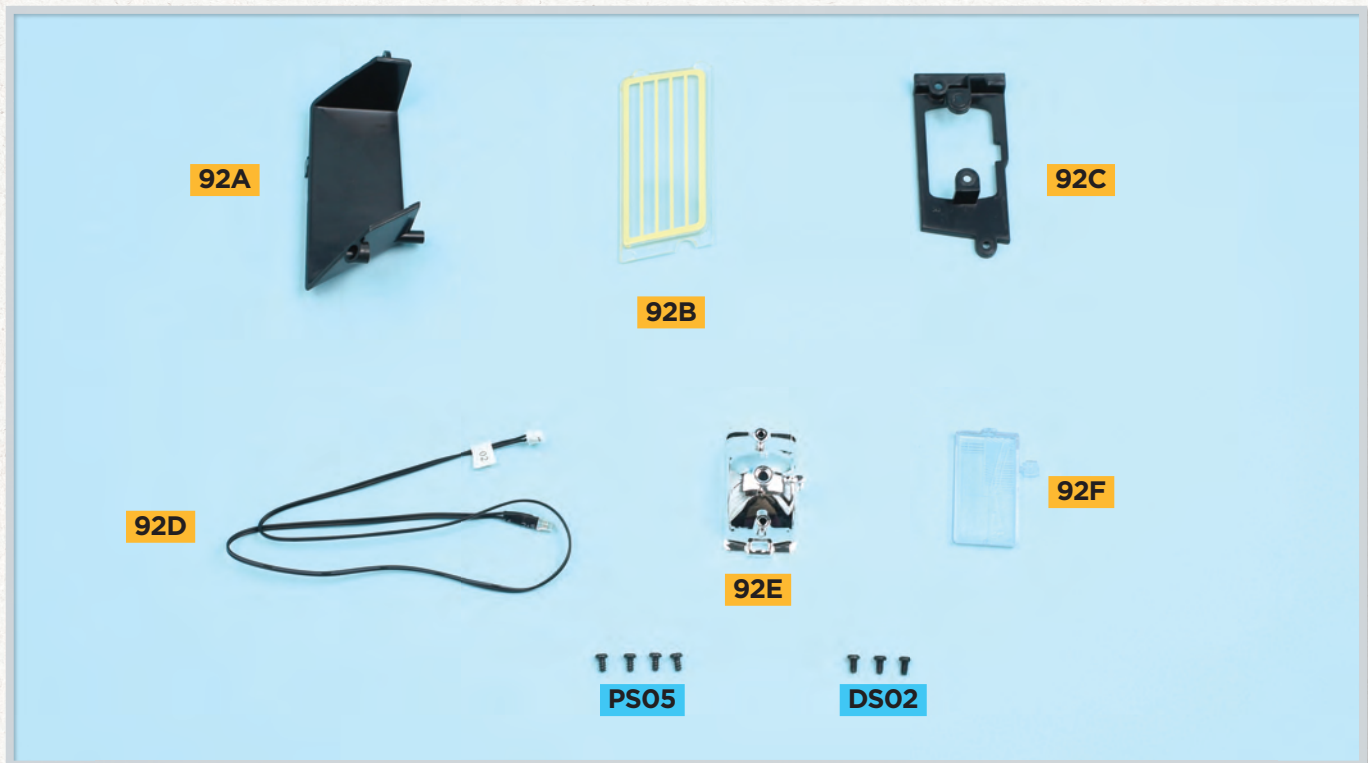

## List of parts:


- 92A** Headlight housing (right)
- 92B** Headlight outer lens (right)
- 92C** Headlight reflector holder (right)
- 92D** LED and cable (labelled O2)
- 92E** Headlight reflector (right)
- 92F** Headlight lens
- PS05** Four\* 2.3 x 4mm PB screws
- DS02** Three\* 2.3 x 4mm PM screws

\* Including spare  
 PM = Pan head for metal  
 PB = Pan head for plastic

## Area of assembly



## Stage 92: Right Headlight

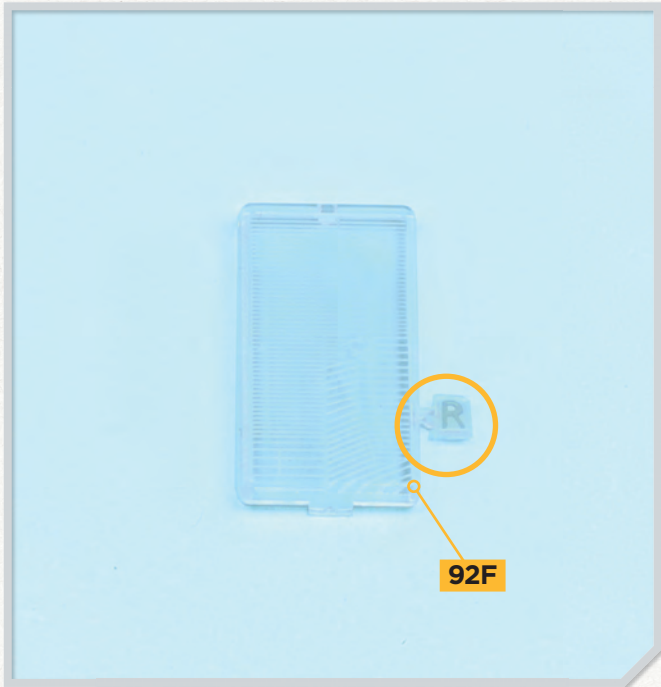

### STEP 1

Take the headlight lens **92F** and check that the small tab is labelled R (circled).



### STEP 2

Clip the tab off the lens **92F** using a sharp pair of clippers. Smooth off any roughness if necessary.




### STEP 3

Fit the lens **92F** over the headlight reflector **92E**. Note that the tabs on part **92F** and slots on part **92E** are different sizes, to ensure you fit the lens the right way up. You may need to remove any roughness from the tabs to ensure they fit. Push the lens in place firmly.



### STEP 4

Fit the lens reflector assembly **92E/F** into the headlight reflector holder **92C**: raised screw sockets on the back of the reflector align with screw holes on tabs in the holder **92C**.

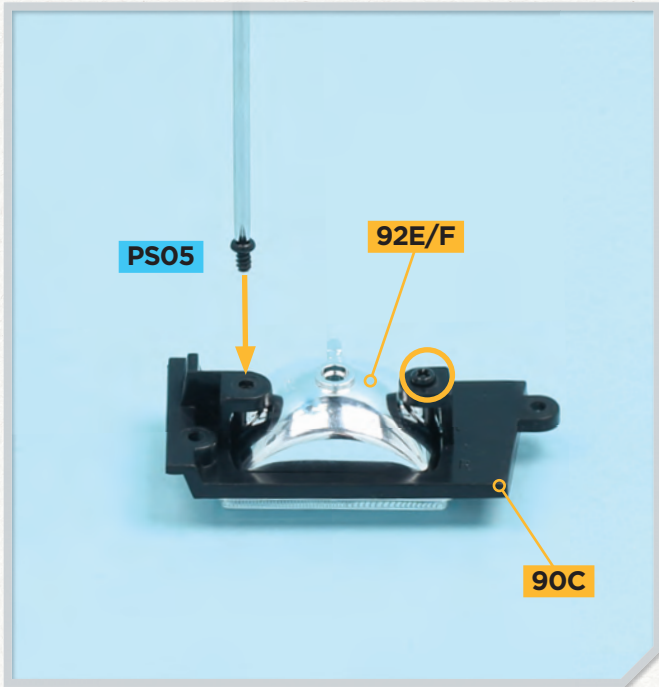


### STEP 5

Turn the assembly over and fix the headlight in place with two **PS05** screws (one screw is already fitted here, circled in yellow).




### STEP 6

Take the headlight housing **92A** and check that the tab is labelled R. Remove the tab with a pair of sharp clippers.

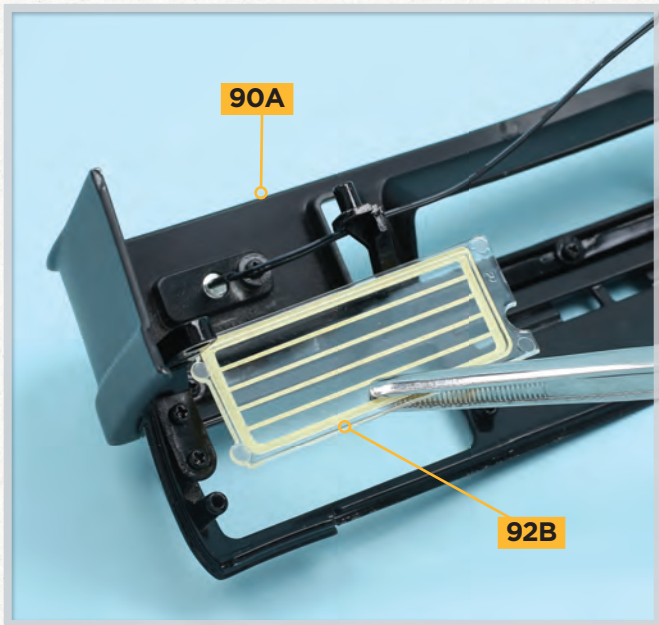

### STEP 7


Fit the outer headlight lens **92B** into the opening on the right-hand side of the skirt assembly from the previous issue. Note the orientation of the lens, which is fitted to the inside of part **90A**. Note that the skirt is shown with the upper edge at the bottom for clarity.

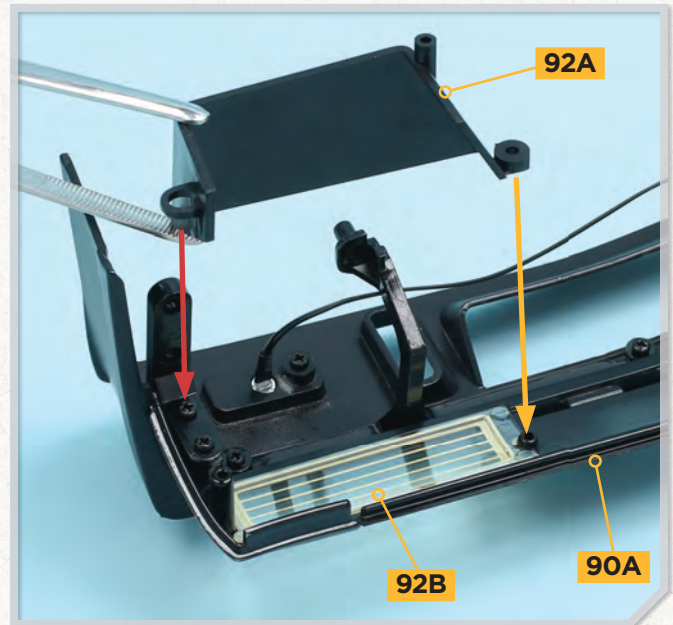

### STEP 8


Fit the housing **92A** around the lower edge of the lens **92B**. A hole in one of the tabs in part **92A** fits over a raised screw socket in part **90A** (red arrow). The hole in the tab on the other side of part **92A** aligns with a socket in part **90A** (yellow arrow).

## Stage 92: Right Headlight

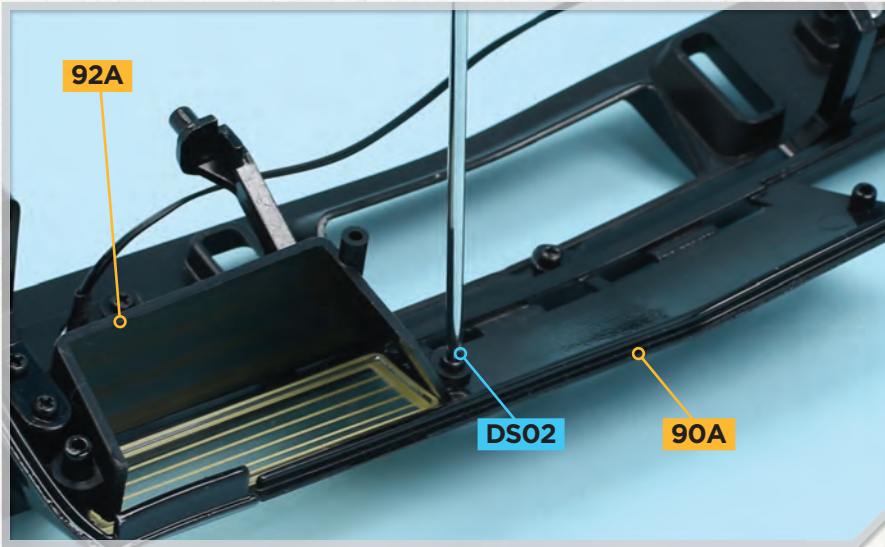


### STEP 9

Fix one side of part **92A** in place with a **DS02** screw.

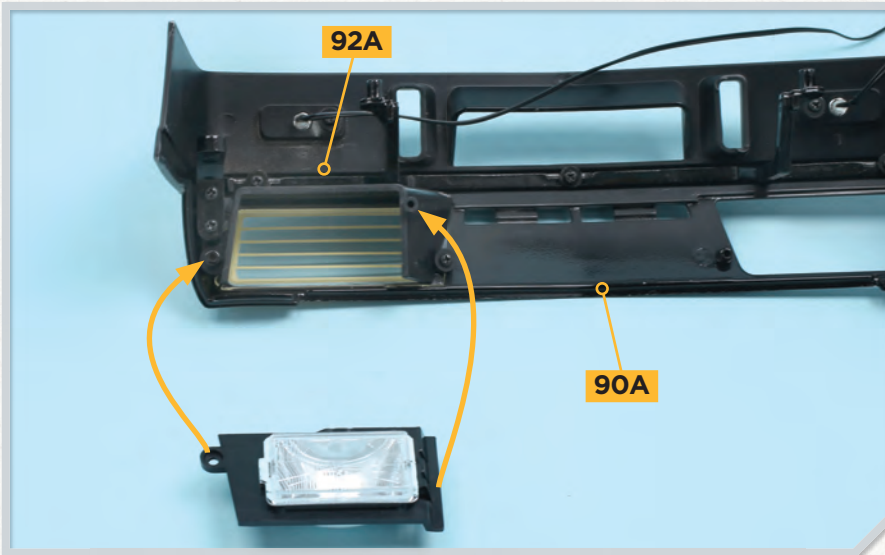


### STEP 10

Fit the headlight assembly from step 5 to the rim of the holder **92A** so that the screw holes are aligned, as indicated.

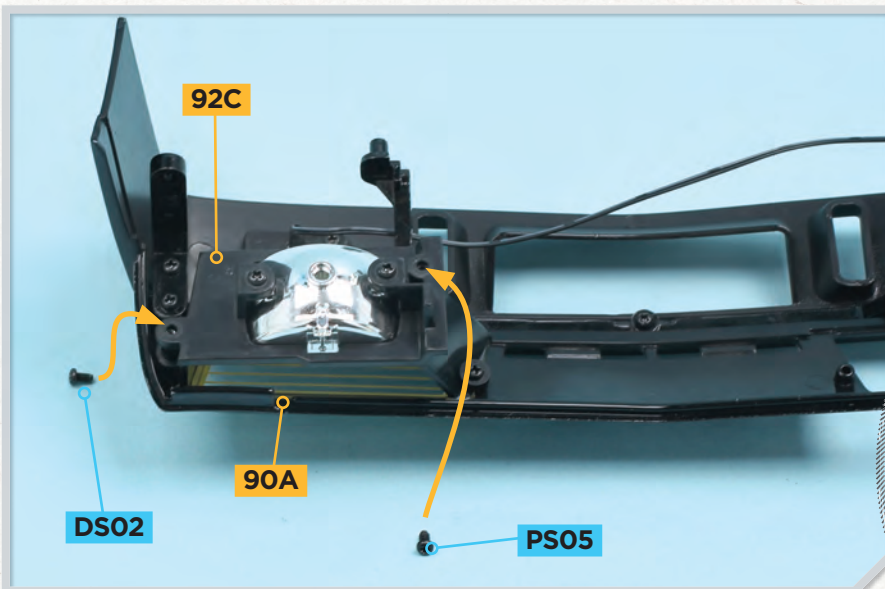

### STEP 11


Fix the headlight reflector holder **92C** in place: use a **DS02** screw on the outer edge and a **PS05** screw on the inner side of the assembly.

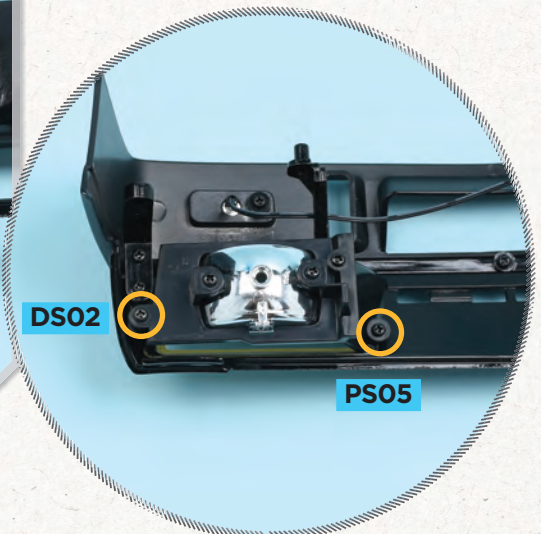




## STEP 12

Take the cable **92D**, labelled O2, and fit the LED into the socket in the back of the right headlight reflector **92E**.

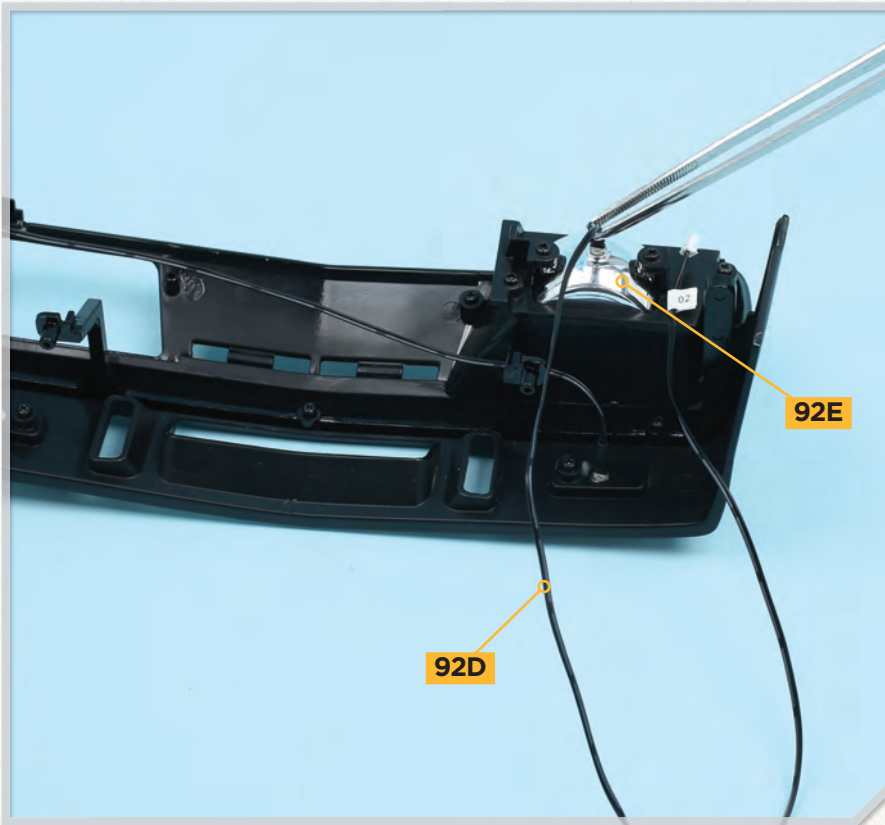

## COMPLETED ASSEMBLY

The right headlight has been fitted to the front skirt assembly.

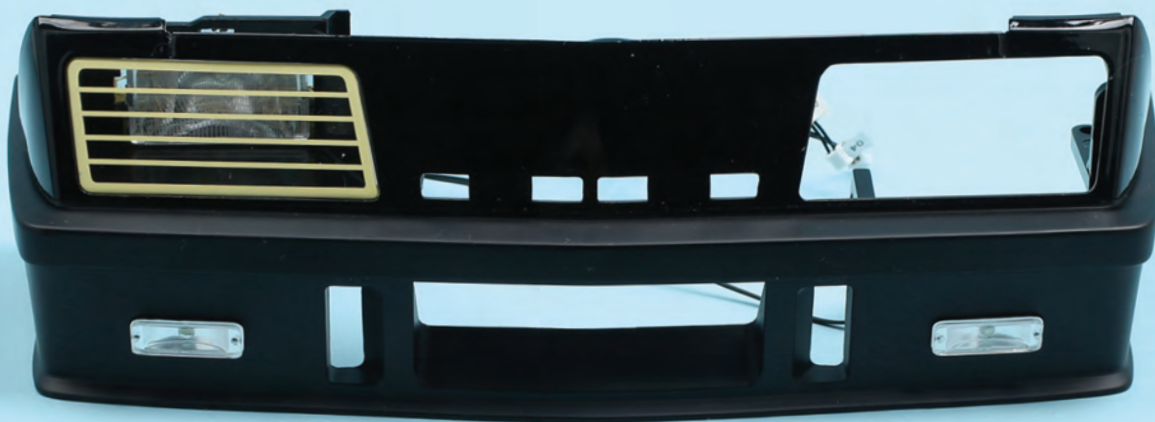

# COMING IN ISSUE 93




## • ASSEMBLY GUIDE

The left headlight is fitted to the front bumper skirt assembly.

## NEW PARTS

Left headlight housing, outer lens, reflector holder, LED and cable, reflector, lens and screws.

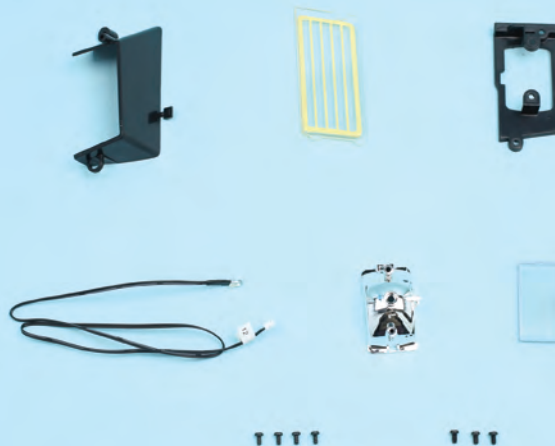

Published weekly

UK: £10.99

AUS: \$21.99



[hachettepartworks.com/FordFalcon](http://hachettepartworks.com/FordFalcon)